


**Z terminal with tension spring connection
ZMAK 2.5**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

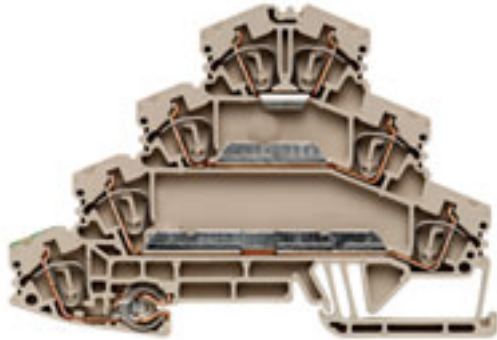

Modular terminals with tension-clamp system, the Z series, are tailored specifically to customer requirements: The multi-tier terminal ZMAK 2.5 brings clarity to your cabling:

- TOP connection with tension-clamp system
- 5 mm terminal width
- Clampable conductors: 0.5 to 4 mm²
- 30 A continuous current

General ordering data

Type	ZMAK 2.5
Order No.	1768000000
GTIN (EAN)	4032248117376
Qty.	25 pc(s).

Z terminal with tension spring connection ZMAK 2.5

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

Dimensions and weights

Length	102 mm	Width	5.1 mm
Height	69.5 mm	Height of lowest version	70 mm
Net weight	22.38 g		

Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on
Version	Tension-clamp connection, With PE connection, One end without connector		

CSA ratings data

Certificate No. (CSA)	200039-1152892	Voltage size D (CSA)	300 V
Current size D (CSA)	25 A	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	2.5 mm ²
---	---------------------	---	---------------------

Clampable wires (rated connection)

Type of connection	Tension clamp connection	Stripping length	10 mm
Blade size	0.6 x 3.5 mm	Connection direction	top
Number of connections	7	Clamping range, rated connection, min.	0.13 mm ²
Clamping range, rated connection, max.	4 mm ²	Gauge to IEC 60947-1	A3
Wire connection cross section, solid core, max. rated connection	0.5 mm ²	Wire connection cross section, solid core max. rated connection	4 mm ²
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm ²
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Rated data

Rated voltage	400 V	Rated impulse withstand voltage	6 kV
Rated current	24 A	Current at maximum wires	31 A
Standards	IEC 60947-1 (-7-2)	Pollution severity	3

Z terminal with tension spring connection ZMAK 2.5

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

UL ratings data

Certificate No. (UR)	E60693	Voltage size B (UR)	300 V
Voltage size D (UR)	300 V	Current size B (UR)	25 A
Current size D (UR)	10 A	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG

Material data

Insulating material	Wemid	Material	Wemid
Colour	Dark Beige	UL 94 flammability rating	V-0

System specifications

Product family	Z terminal with tension spring connection	Type of connection	Tension clamp connection
Connection direction	top	Number of levels	2
Number of connections	7	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes		

Classifications

ETIM 3.0	EC000897	UNSPSC	30-21-18-01
eClass 5.1	27-14-11-18	eClass 6.2	27-14-11-20
eClass 7.1	27-14-11-20		

Product information

Descriptive text ordering data The ZMAK 2.5 690 V: with pre-assembled end plate and a width of 6.1 mm!

Approvals

Approvals



ROHS Conform