

# Bus system cable - SAC-4P-M 8MS/ 2,0-950 - 1543249

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Bus system cable, INTERBUS, INTERBUS, 4-position, PUR halogen-free, Black RAL 9005, shielded, Plug straight M8, on Free cable end, Cable length: 2 m

## Product Features

- Power cable for actuator voltage
- System cable for supply voltage and bus signal

## Key commercial data

package_quantity	1
GTIN	4046356097406

## Technical data

### Dimensions

Length of cable	2 m
Stripping length of the free conductor end	50 mm

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
Degree of protection	IP65
Degree of protection	IP67

### General

Rated current at 40°C	4 A
Rated voltage	30 V
Number of positions	4
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Signal type/category	INTERBUS
Status display	No
Surge voltage category	II
Pollution degree	3
Test voltage	800 V
Torque	0.2 Nm (M8 connectors)

### Material

# Bus system cable - SAC-4P-M 8MS/ 2,0-950 - 1543249

## Technical data

### Material

<b>Inflammability class according to UL 94</b>	HB
<b>Contact material</b>	CuSn
<b>Contact surface material</b>	Ni/Au
<b>Contact carrier material</b>	TPU GF
<b>Material of grip body</b>	TPU, hardly inflammable, self-extinguishing
<b>Material, knurls</b>	Zinc die-cast, nickel-plated

### Pin assignment

<b>Position = wire color (signal) = position (optional)</b>	1 (Plug) = RD (0.34 mm <sup>2</sup> )
<b>Position = wire color (signal) = position (optional)</b>	3 (Plug) = BU (0.34 mm <sup>2</sup> )
<b>Position = wire color (signal) = position (optional)</b>	2 (Plug) = YE (0.14 mm <sup>2</sup> )
<b>Position = wire color (signal) = position (optional)</b>	4 (Plug) = GN (0.14 mm <sup>2</sup> )

### Cable

<b>Cable type</b>	INTERBUS
<b>Cable type (abbreviation)</b>	950
<b>UL AWM style</b>	20963 (80°C/30 V)
<b>Conductor cross section</b>	2x 0.14 mm <sup>2</sup> (signal line)
<b>Conductor cross section</b>	2x 0.34 mm <sup>2</sup> (Power supply)
<b>Conductor cross section</b>	1x 0.38 mm <sup>2</sup> (Drain wire)
<b>AWG signal line</b>	26
<b>AWG power supply</b>	22
<b>Conductor structure signal line</b>	19x 0.10 mm
<b>Conductor structure, voltage supply</b>	19x 0.15 mm
<b>Core diameter including insulation</b>	0.97 mm (signal line)
<b>Core diameter including insulation</b>	1.25 mm (Power supply)
<b>Thickness, insulation</b>	0.24 mm (Conductor insulation, signal line)
<b>Thickness, insulation</b>	0.25 mm (Conductor insulation, voltage supply)
<b>Wire colors</b>	red-blue, green-yellow
<b>Twisted pairs</b>	2 cores to the pair
<b>Type of pair shielding</b>	Aluminum-lined polyester foil
<b>Overall twist</b>	2 pairs around a drain wire in the center to the core
<b>Shielding</b>	Tinned copper braided shield
<b>Optical shield covering</b>	85 %
<b>External sheath, color</b>	Black RAL 9005
<b>Outer sheath thickness</b>	approx. 0.75 mm
<b>External cable diameter D</b>	5.2 mm ± 0.2 mm
<b>Smallest bending radius, fixed installation</b>	26 mm
<b>Smallest bending radius, movable installation</b>	37 mm
<b>Number of bending cycles</b>	1000000
<b>Bending radius</b>	110 mm
<b>Traversing path</b>	6 m

## Bus system cable - SAC-4P-M 8MS/ 2,0-950 - 1543249

### Technical data

#### Cable

Traversing rate	4 m/s
Acceleration	4 m/s <sup>2</sup>
Cable weight	41 kg/km
Outer sheath, material	PUR
Material conductor insulation	PP
Conductor material	Tin-plated Cu litz wires
Insulation resistance	≥ 20 MΩ*km
Conductor resistance	≤ 155 Ω/km (signal line)
Conductor resistance	≤ 58 Ω/km (Power supply)
Nominal voltage, cable	≤ 100 V
Test voltage Core/Core	1000 V
Test voltage Core/Shield	1000 V
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
Ambient temperature (operation)	-40 °C ... 80 °C (cable, flexible installation)

### classifications

#### eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27279218
eCl@ss 7.0	27279218
eCl@ss 8.0	27279218

#### ETIM

ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855


#### UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

### Drawings


# Bus system cable - SAC-4P-M 8MS/ 2,0-950 - 1543249

Dimensioned drawing

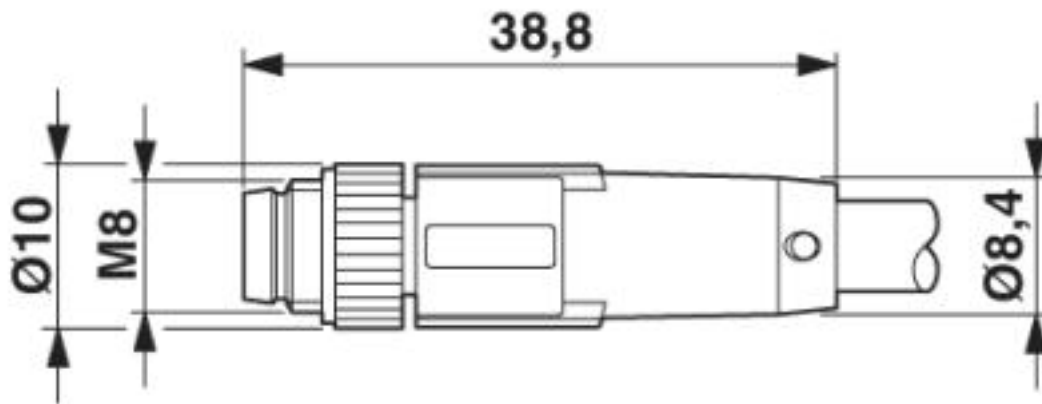

Plug M8 x 1, straight, shielded


Circuit diagram

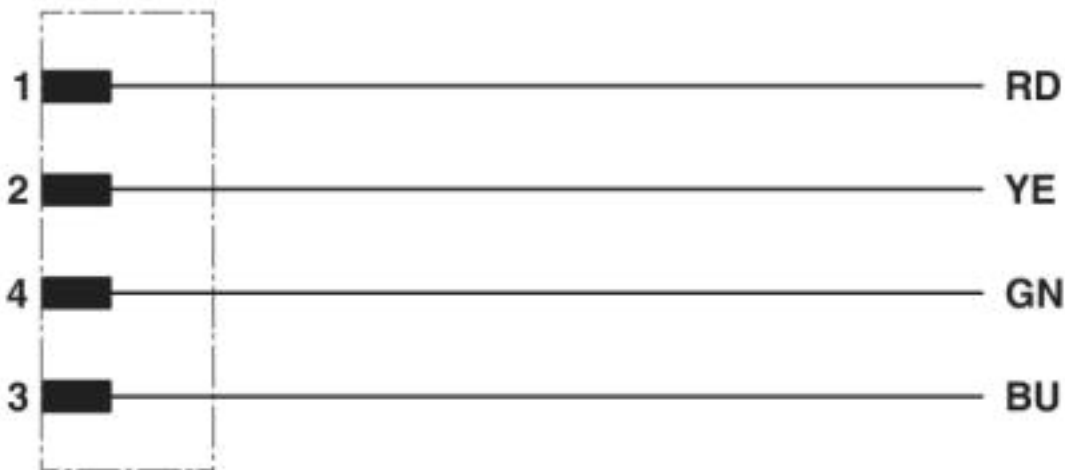

Contact assignment of the M8 plug

## Bus system cable - SAC-4P-M 8MS/ 2,0-950 - 1543249

Schematic diagram

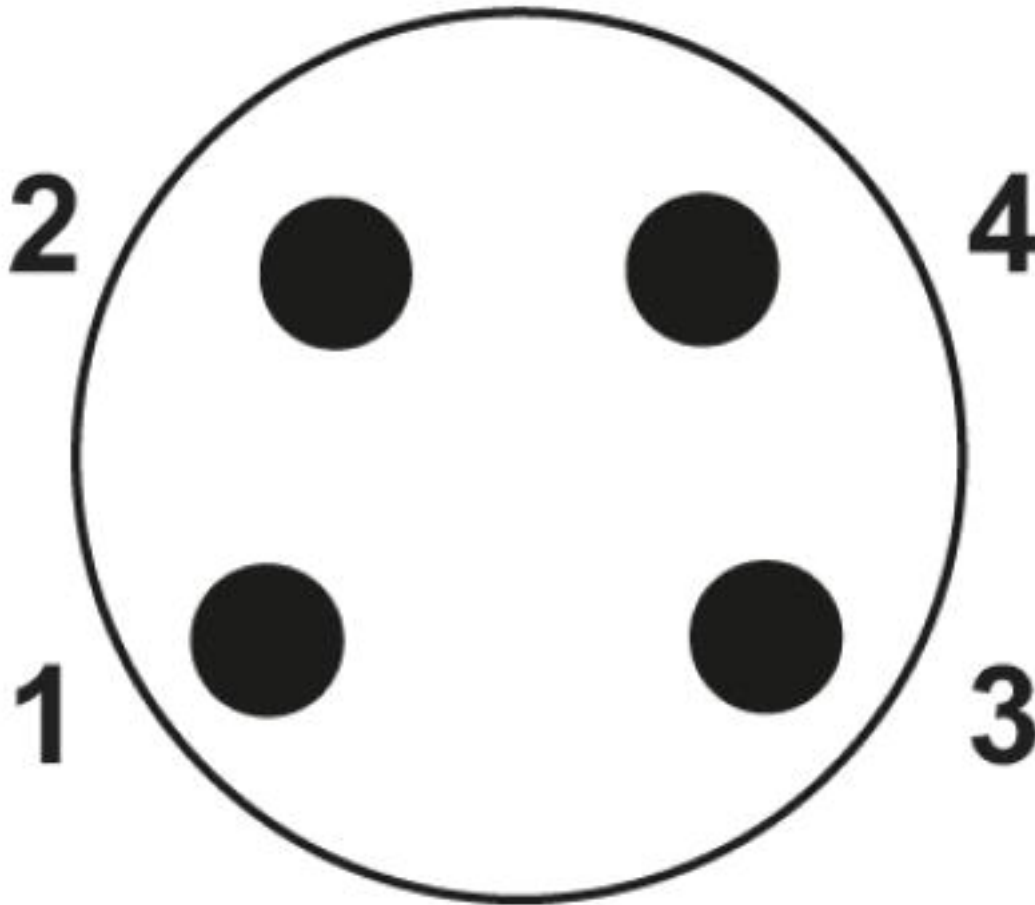

Pin assignment M8 plug, 4-pos., view male side

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>