

High Current Connectors - UHV 95-KH/AS - 2130127

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Universal terminal block with mixed connection, cross section: 35 - 95 mm², AWG: 2 - 4/0, width: 40 mm, color: gray

The illustration shows a combination of versions UHV 95-AS/AS, UHV 95-KH/AS and UHV 95-KH/KH

Product Features

- The UHV ... high-current connectors are available in several versions
- Versions are available with a cable lug or direct connection and there is a mixed version of both connection methods
- The comprehensive range of accessories, such as the connection rail for cross connection, ensures safe and user-friendly wiring of conductors up to 240 mm²

Key commercial data

package_quantity	10
GTIN	4017918052904

Technical data

General

Number of levels	1
Number of connections	2
Color	gray
Insulating material	PA-F
Inflammability class according to UL 94	HB

General

Rated surge voltage	8 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	II
Connection in acc. with standard	IEC 60947-7-1
Nominal current I_N	232 A
Nominal voltage U_N	1000 V
Open side panel	nein
Surge voltage test setpoint	9.8 kV
Result of surge voltage test	Test passed
Power frequency withstand voltage setpoint	2.2 kV

High Current Connectors - UHV 95-KH/AS - 2130127

Technical data

General

Result of power-frequency withstand voltage test	Test passed
Checking the mechanical stability of terminal points (5 x conductor connection)	Test passed
Bending test conductor cross section/weight	25 mm ² / 4.5 kg
Bending test conductor cross section/weight	35 mm ² / 6.8 kg
Bending test conductor cross section/weight	95 mm ² /14 kg
Result of bending test	Test passed
Conductor cross section tensile test	25 mm ²
Tractive force setpoint	135 N
Conductor cross section tensile test	35 mm ²
Tractive force setpoint	190 N
Conductor cross section tensile test	95 mm ²
Tractive force setpoint	351 N
Tensile test result	Test passed
Tight fit on carrier	NS 32/NS 35
Setpoint	15 N
Result of tight fit test	Test passed
Requirements, voltage drop	$U_1 \leq 3.2 \text{ mV}$
Result of voltage drop test	Test passed
Temperature-rise test	Test passed
Conductor cross section short circuit testing	95 mm ²
Short-time current	11.4 kA
Short circuit stability result	Test passed
Proof of thermal characteristics (needle flame) effective duration	30 s
Result of thermal test	Test passed
Temperature index, insulating material (DIN EN 60216-1 (VDE 0304-21))	125 °C

Dimensions

Length	114 mm
Width	40 mm
Height NS 35/15	86 mm

Connection data

Conductor cross section solid min.	25 mm ²
Conductor cross section solid max.	95 mm ²
Conductor cross section stranded min.	35 mm ²
Conductor cross section stranded max.	95 mm ²
Conductor cross section AWG/kcmil min.	3
Conductor cross section AWG/kcmil max	3/0
Conductor cross section stranded, with ferrule without plastic sleeve min.	35 mm ²

High Current Connectors - UHV 95-KH/AS - 2130127

Technical data

Connection data

Conductor cross section stranded, with ferrule without plastic sleeve max.	95 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	35 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	95 mm ²
2 conductors with same cross section, solid min.	25 mm ²
2 conductors with same cross section, solid max.	35 mm ²
2 conductors with same cross section, stranded min.	25 mm ²
2 conductors with same cross section, stranded max.	35 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	16 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	35 mm ²
Stripping length	29 mm
Screw thread	M8
Tightening torque, min	15 Nm
Tightening torque max	20 Nm
Connection method	Bolt connection
Connection in acc. with standard	DIN 46,235
Min. cross section	25 mm ²
Max. cross section	95 mm ²
Hole diameter	13 mm
Bolt diameter	12 mm
Bolt thread	M12
Tightening torque, min	25 Nm
Tightening torque max	30 Nm
Connection in acc. with standard	DIN 46 234
Min. cross section	10 mm ²
Max. cross section	95 mm ²
Hole diameter	13 mm
Bolt diameter	12 mm
Bolt thread	M12
Tightening torque, min	25 Nm
Tightening torque max	30 Nm
Power rail	30 mm x 5 mm

classifications

eCl@ss

eCl@ss 4.0	27141120
eCl@ss 4.1	27141120
eCl@ss 5.0	27141120

High Current Connectors - UHV 95-KH/AS - 2130127

classifications

eCl@ss

eCl@ss 5.1	27141120
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141120

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897
ETIM 5.0	EC000897

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

approvals

CSA / UL Recognized / GOST / GL / PRS / GOST /

Approval details

Usegroups	B	C
Nominal voltage UN	600 V	600 V
Nominal current IN	200 A	200 A
mm ² /AWG/kcmil	2	2

Nominal voltage UN	600 V
Nominal current IN	230 A
mm ² /AWG/kcmil	2


--	--

High Current Connectors - UHV 95-KH/AS - 2130127

approvals

GL

PRS



accessories

Partition plate

UHV -TP2 - 2130415



Flange

UHV -E - 2130428



Bridge

UHV 95-VS 2 - 2130635



High Current Connectors - UHV 95-KH/AS - 2130127

accessories

UHV 95-VS 3 - 2130648



Cover

UHV 95-AH - 2130457



Mounting material

UKH 95 EP - 3009231



Socket spanner

VDE-ISS 6 - 1201934



Terminal marking

SBS10:UNBEDRUCKT - 1007248



High Current Connectors - UHV 95-KH/AS - 2130127

accessories

ZB 10:UNBEDRUCKT - 1053001



UC-TM 10 - 0818069



UCT-TM 10 - 0829142



Mounting rail

NS 32 PERF 2000MM - 1201002



NS 32 UNPERF 2000MM - 1201015



Labeled terminal marker

High Current Connectors - UHV 95-KH/AS - 2130127

accessories

ZB 10 CUS - 0824941



UC-TM 10 CUS - 0824605



UCT-TM 10 CUS - 0829623



End block

E/AL-NS 32 - 1201659




E/AL-NS 35 - 1201662



Drawings


High Current Connectors - UHV 95-KH/AS - 2130127

Dimensioned drawing

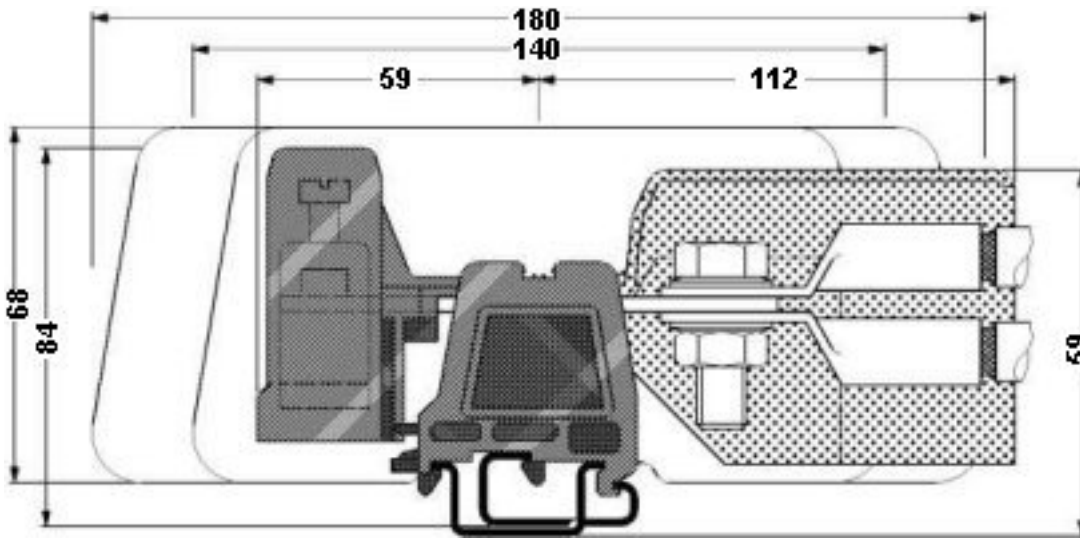


High Current Connectors - UHV 95-KH/AS - 2130127

Dimensioned drawing

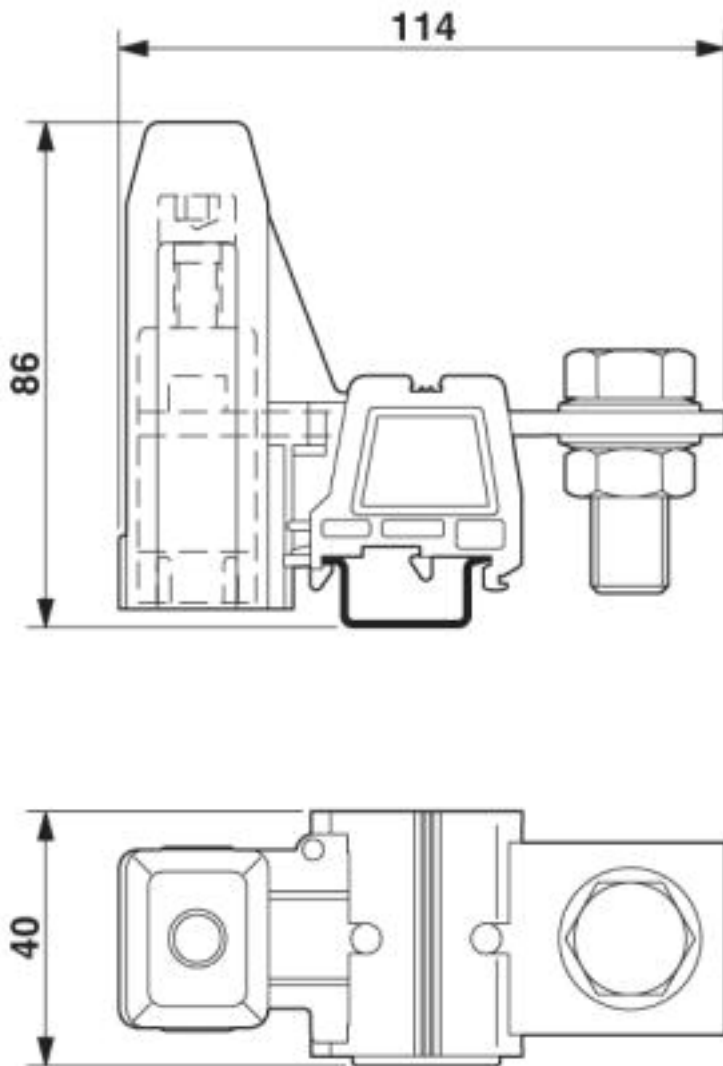


High Current Connectors - UHV 95-KH/AS - 2130127

Dimensioned drawing

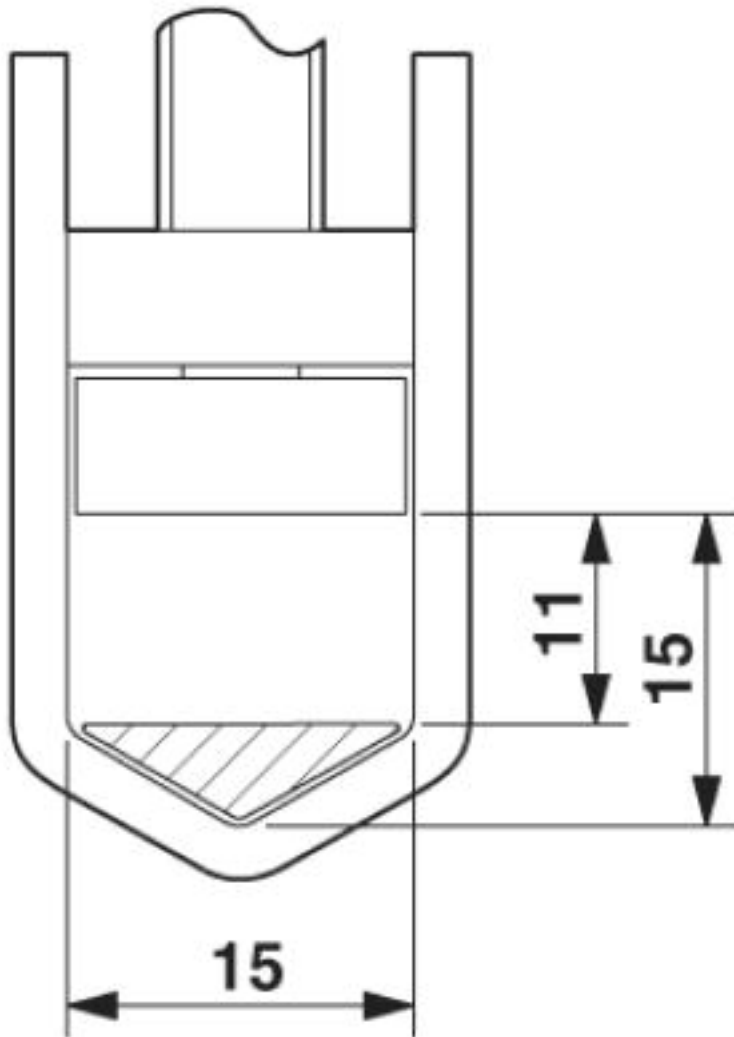


High Current Connectors - UHV 95-KH/AS - 2130127

Pictogram

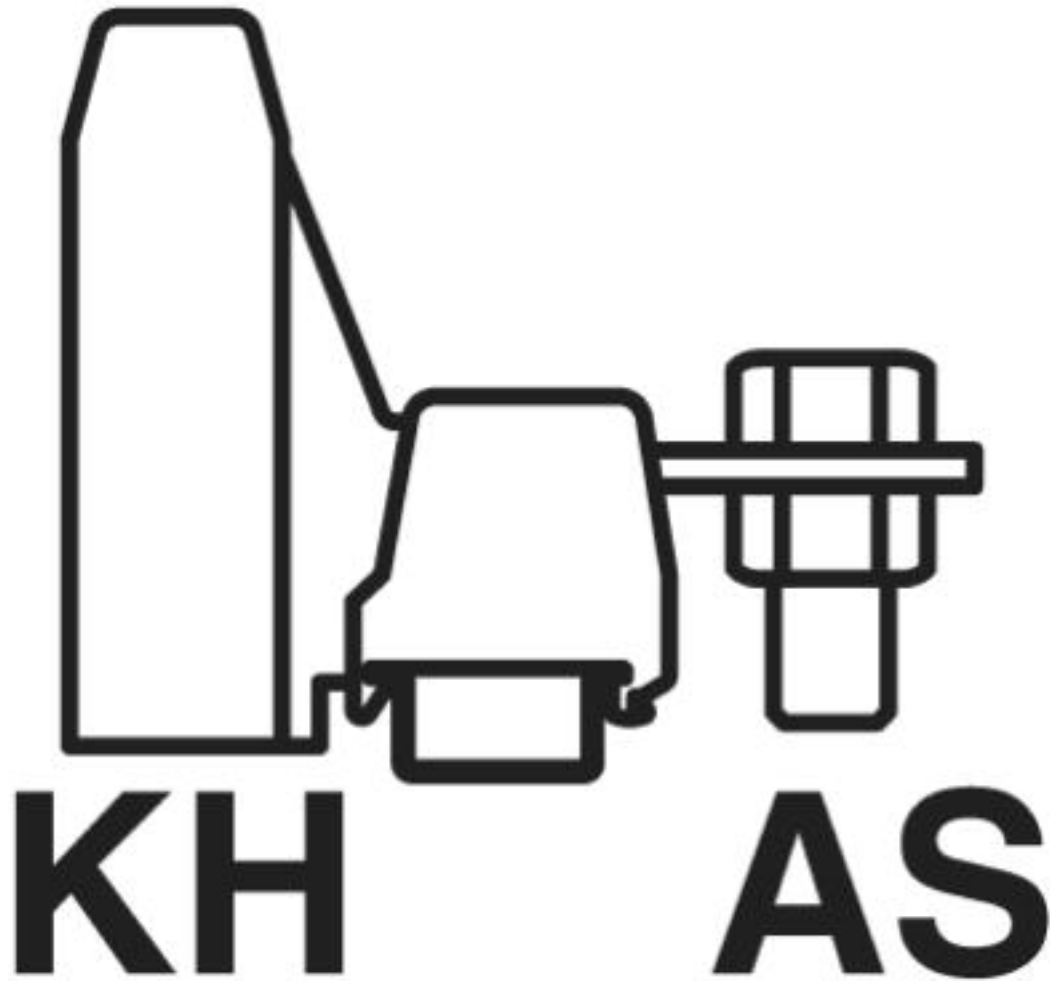

High Current Connectors - UHV 95-KH/AS - 2130127

Circuit diagram

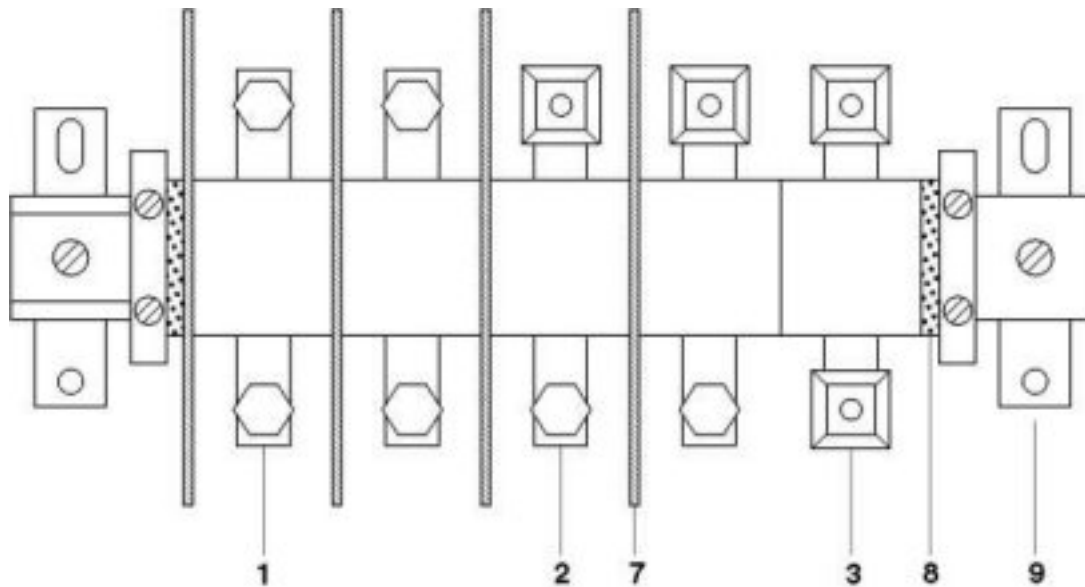

1 = high current connector, AS screw set on both sides
2 = high current connector, terminal sleeve KH on one side, screw set AS on the other side
3 = high current connector, terminal sleeves KH on both sides, for direct cable connection
7 = separating plate
8 = end piece
9 = flat bracket

Circuit diagram



© Phoenix Contact 2013 - all rights reserved
<http://www.phoenixcontact.com>