

# PCB terminal block - MKDS 1/10-3,81 SMD BK - 1727308

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



PCB terminal block, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 10, Connection method: Screw connection, Mounting: SMD/THT/THR, Conductor/PCB connection direction: 0 °, Color: black

## Product Features

- Standard PCB terminal block types made from high-temperature-resistant plastics
- Type of packaging: tube magazine
- Box packaging or tape-on-reel packing according to IEC 60286-3 for automated mounting available on request
- Use in SMT reflow processes

## Key commercial data

package_quantity	11
GTIN	4017918025670

## Technical data

### Dimensions

Length	7.3 mm
Pitch	3.81 mm
Dimension a	34.29 mm

### General

Range of articles	MKDS 1/..-SMD
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I <sub>N</sub>	8 A
Nominal cross section	1 mm <sup>2</sup>
Maximum load current	8 A (with 1.5 mm <sup>2</sup> conductor cross section)
Insulating material	PA-F
Solder pin surface	Sn
Inflammability class according to UL 94	V0

# PCB terminal block - MKDS 1/10-3,81 SMD BK - 1727308

## Technical data

### General

Stripping length	5 mm
Number of positions	10
Screw thread	M2
Tightening torque, min	0.22 Nm
Tightening torque max	0.25 Nm

### Connection data

Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	1 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve max.	0.5 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve max.	0.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16
2 conductors with same cross section, solid min.	0.14 mm <sup>2</sup>
2 conductors with same cross section, solid max.	0.5 mm <sup>2</sup>
2 conductors with same cross section, stranded min.	0.14 mm <sup>2</sup>
2 conductors with same cross section, stranded max.	0.2 mm <sup>2</sup>
Minimum AWG according to UL/CUL	30
Maximum AWG according to UL/CUL	16

## classifications

### eCl@ss

eCl@ss 4.0	27141109
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 7.0	27440401
eCl@ss 8.0	27440401

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002643
ETIM 5.0	EC002643

### UNSPSC

# PCB terminal block - MKDS 1/10-3,81 SMD BK - 1727308

## classifications

### UNSPSC

<b>UNSPSC 6.01</b>	30211801
<b>UNSPSC 7.0901</b>	39121432
<b>UNSPSC 11</b>	39121432
<b>UNSPSC 12.01</b>	39121432
<b>UNSPSC 13.2</b>	39121432

## approvals

CSA / UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized /

### Approval details

Usegroups	B	D
Nominal voltage UN	150 V	300 V
Nominal current IN	10 A	10 A
mm <sup>2</sup> /AWG/kcmil	28-16	28-16

Usegroups	B	D
Nominal voltage UN	300 V	300 V
Nominal current IN	10 A	10 A
mm <sup>2</sup> /AWG/kcmil	30-16	30-16

Usegroups	B	D
Nominal voltage UN	300 V	300 V
Nominal current IN	10 A	10 A
mm <sup>2</sup> /AWG/kcmil	30-16	30-16

--	--	--

# PCB terminal block - MKDS 1/10-3,81 SMD BK - 1727308

approvals



accessories

**Labeled terminal marker**

SK 3,81/2,8:FORTL.ZAHLEN - 0804109



---

**Screwdriver tools**

SZS 0,4X2,5 VDE - 1205037




---

Drawings


# PCB terminal block - MKDS 1/10-3,81 SMD BK - 1727308

Drilling diagram

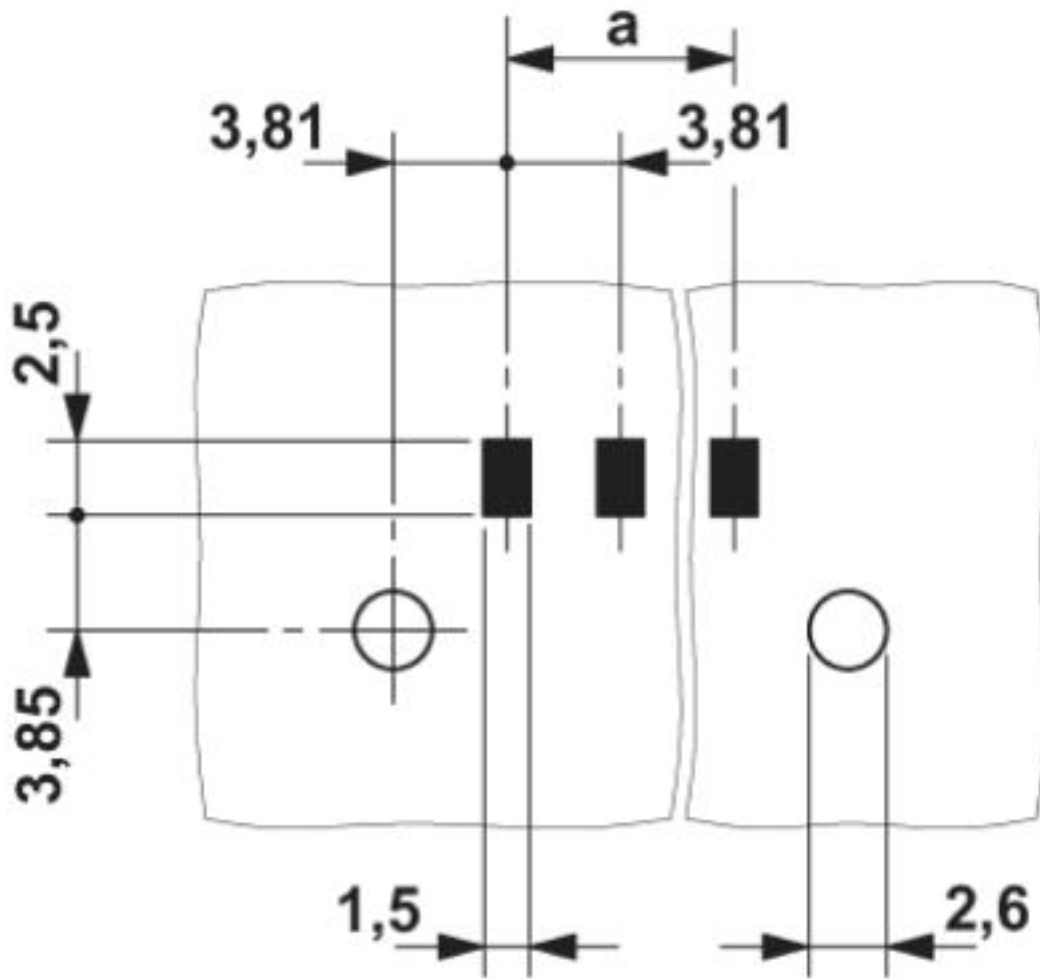

# PCB terminal block - MKDS 1/10-3,81 SMD BK - 1727308

Dimensioned drawing

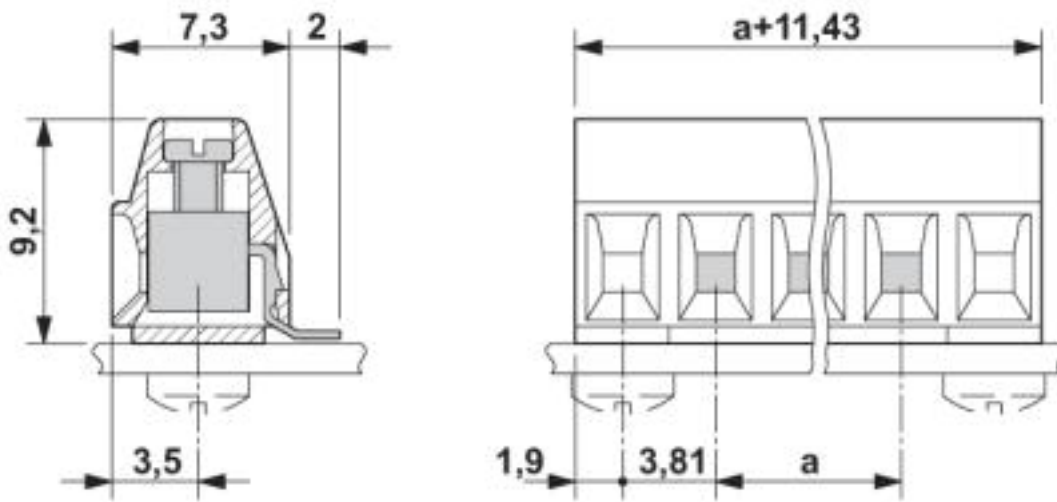

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>