

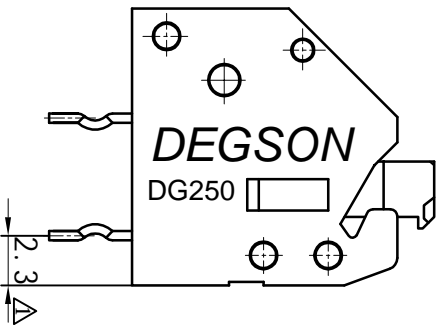
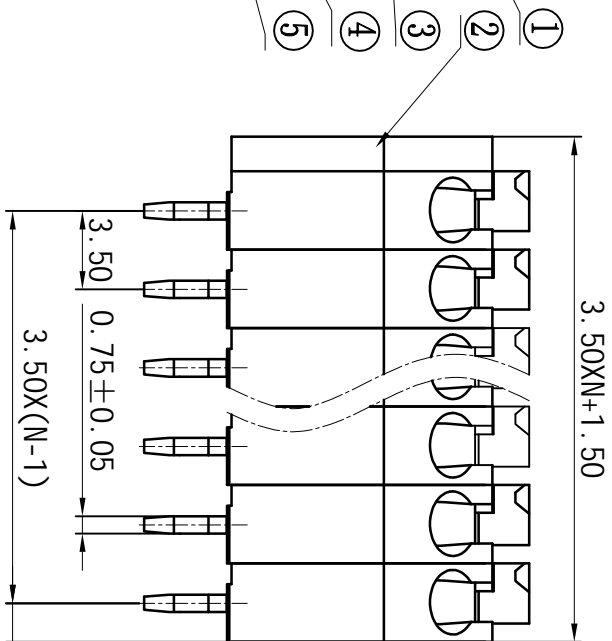


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE
12-150		客户要求增加最大额定电流参数	09/07/12
		CHEN	

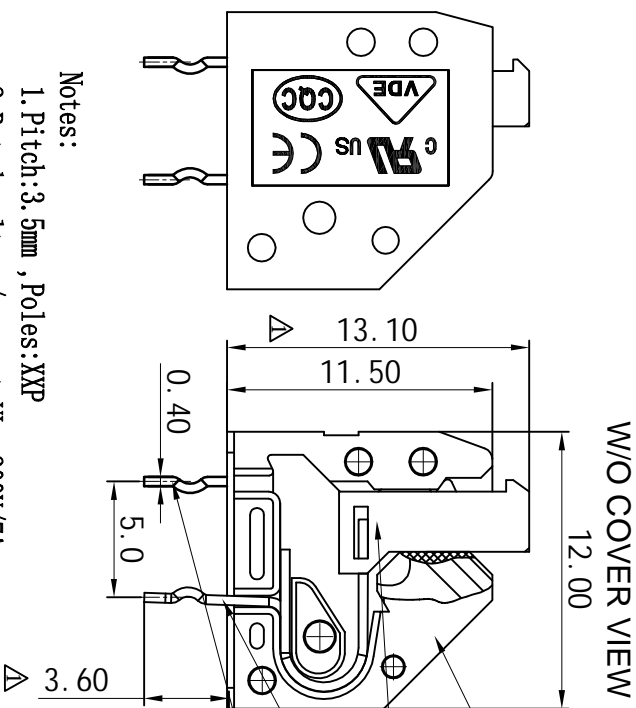

- Notes:
1. Pitch: 3.5mm , Poles:XXP
  2. Rated voltage/current:UL 300V/7A  
Δ VDE 450V/5A
  3. Operation temperatures: -40℃~+105℃
  4. Withstanding Voltage:AC2500/1Min
  5. Insulation Resistance:5000MΩ /DC1000V
  6. Wire Range:22~18AWG, 0.2mm<sup>2</sup>~0.75mm<sup>2</sup>
  7. Undimensioned Tolerances:

Pitch range in mm	over 6 to 10	over 10 to 24	Nominal dimension range in mm	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2±0.3	±0.5±0.7	±1.0	0.005/10	

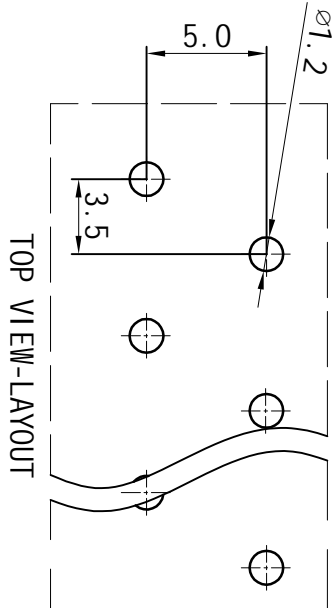

ITEM	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
1	DG250-3.5 Housing (自动化)	3018A0Y01C(H)	XX	PA66	UL94V-0
2	DG250-3.5 Button (自动化)	3018D0Y01D(H)	XX	PA66	UL94V-0
3	DG250-3.5 Cover	3018C0Y01A(H)	1	PA66	UL94V-0

<b>DEGSON</b> 宇波电子电子有限公司 DEGSON ELECTRONICS CO., LTD	
NAME	DG250-3.5-XXP-1Y-01A(H), (自动化) 反装
DRAWING NO.	DG250-3.5-EI33
DD NOT SCALE DRAWING	DD NOT SCALE DRAWING
SIZE	A4
REV	11
DATE	09/07/12

8 7 6 5 4 3 2 1