

Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 8\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
BPH-LM	5	178.6	28	Abt. 0.9	75% Maximum	10% Minimum	130%
	6	150	40				
	9	100	90				
	12	75	160				
	24	37.5	640				
	48	18.8	2560				

Ordering Information

BPH - SS - 1 12 L M P

Terminal Type: Blank:Standard Type P:PCB Type

Contact Form: M:One form A

Coil Type: L:Standard DC Coil

Coil Voltage: 03:3V, 05:5V,06:6V,09:9V
12:12V,24:24V,48:48V

Number of Pole: 1:One Pole


Type of Sealing: SS:Plastic Sealed Type

Type: BPH

Classificatio

Model	BPH	
Coil Sensitivity	Standard DC Coil	
	1A	
Plastic Sealed Type	BPH -SS-1□□LM	BPH -SS-1□□LMP

Dimension

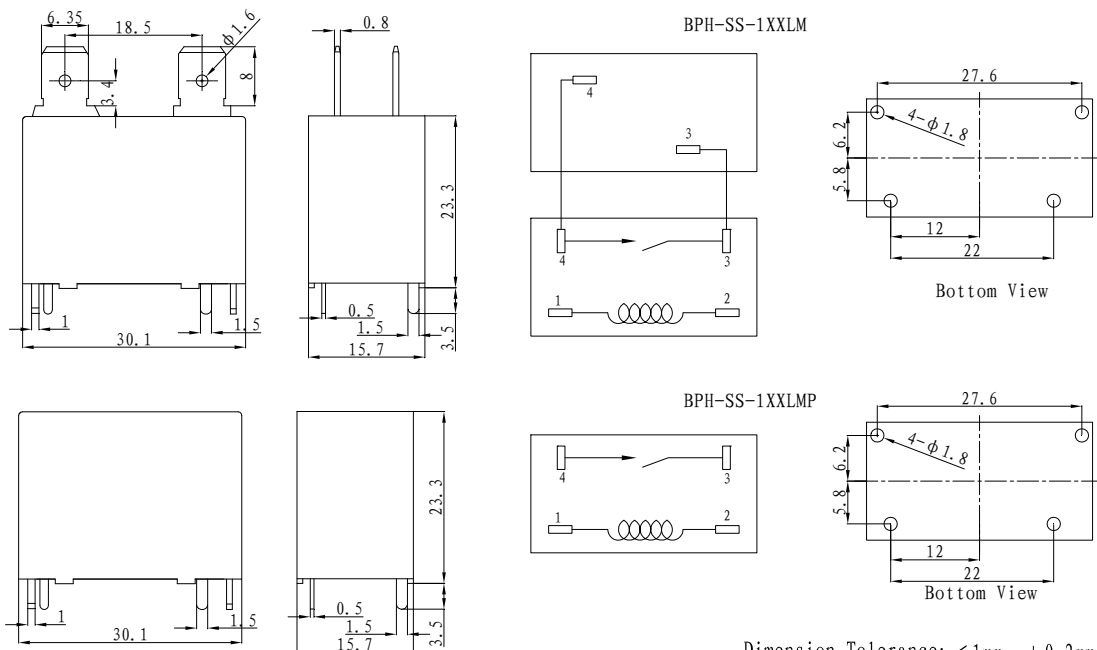

Dimension Tolerance: < 1mm: $\pm 0.2\text{mm}$
1—5mm: $\pm 0.3\text{mm}$
> 5mm: $\pm 0.5\text{mm}$