


HELUTHERM® 145

600 V, flexible single core, cross-linked, halogen-free

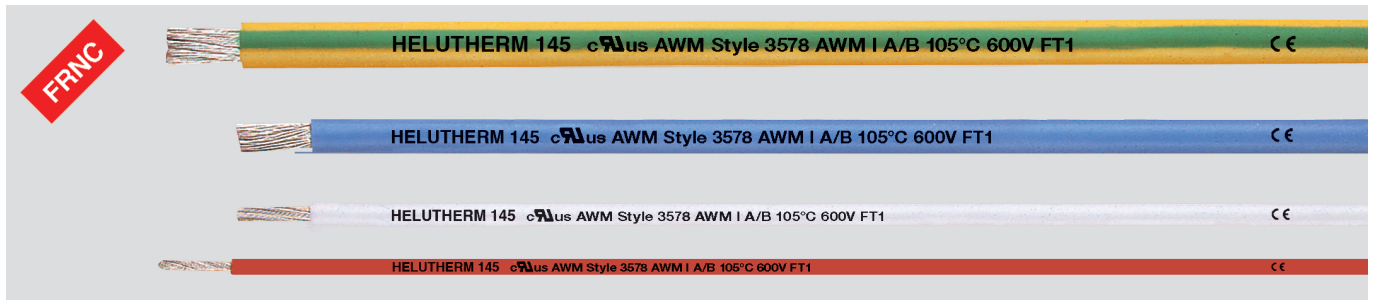

Technical data

- Halogen-free single cores with increased heat resistance acc. to UL Style 3578 CSA C22.2 No. 210
- **Temperature range**
flexing -35°C to +120°C
fixed installation -55°C to +145°C
UL/CSA
flexing -35°C to +105°C
fixed installation -55°C to +105°C
- **Nominal voltage**
600 V
- **Test voltage**
3000 V
- **Minimum bending radius**
flexing 12,5x core Ø
fixed installation 4x core Ø
- **Caloric load values**
see "Technical Informations"
- **Power ratings table**
see "Technical Informations"
- **Approval**
Germanischer Lloyd

Cable structure

- Tinned Cu wires, acc. to DIN VDE 0295 cl.5, BS 6360 cl.5 and IEC 60228 cl.5
 - Core insulation of cross-linked polyolefin-copolymer
 - Core identification, see table below
- Tests**
- Flame test acc. to DIN VDE 0482-332-3-22, BS 4066 part 3, DIN EN 60332-3-22, IEC 60332-3-22 (previously DIN VDE 0472 part 804 test method C)
 - Corrosiveness of combustion gases acc. to DIN VDE 0482 part 267, DIN EN 50267-2-2, IEC 60754-2 (equivalent DIN VDE 0472 part 813)
 - Halogen-free acc. to DIN VDE 0482 part 267, DIN EN 50267-2-1, IEC 60754-1 (equivalent DIN VDE 0472 part 815)
 - Smoke density acc. to DIN VDE 0482 part 1034-1+2, DIN EN 61034-1+2, IEC 61034-1+2, BS 7622 part 1+2 (previously DIN VDE 0472 part 816)

Properties

- Halogen-free
- Lower propagation of fire
- Low development of smoke and fumes
- Good abrasion and notch resistance
- Good resistance to oils and weathering
- Resistant to UV radiation and ozone
- Resistant to soldering temperatures
- Resistant to melting, even when in contact with a soldering iron at temperatures of between 300°C and 380°C, because of the cross-linking for the insulation material
- Due to the high temperature profile the cross section of conductor can under certain circumstances be reduced, hereby enabling a saving in space requirement and weight
- The materials used during manufacturing are cadmium-free, contain no silicone and are free from substances harmful to the wetting properties of lacquers

Application

These temperature resistant single-core cables are used for the internal wiring of lighting fixtures, heaters, electrical machinery, switching systems and distributors in equipment and plant and machinery, suitable for installation on, in and beneath plaster, in closed installation ducts, as well as for traffic systems and outdoor applications. These cables are not approved for direct routing on racks, gutters or tanks. These halogen-free single core cables are characterised by their amazingly high long-time resistance to temperature and feature among the leading halogen-free, flame resistant products in the world.

CE = Product conforms with Low-Voltage Directive 2014/35/EU.

Cross-sec. mm ²	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	BK	GN-YE	BU	BN	RD	WH	GY	VT	YE	PK	GN	OG	BEIGE	2-col.
Part no. 0,25	2,3	2,4	7,0	59473	59472	59474	59475	59476	59477	59478	59479	59480	59483	59482	59481	59484	59485
Part no. 0,5	2,6	4,8	11,0	59487	59486	59488	59489	59490	59491	59492	59493	59494	59497	59496	59495	59498	59499
Part no. 0,75	2,8	7,2	14,0	59501	59500	59502	59503	59504	59505	59506	59507	59508	59511	59510	59509	59512	59513
Part no. 1	2,9	9,6	17,0	59515	59514	59516	59517	59518	59519	59520	59521	59522	59525	59524	59523	59526	59527
Part no. 1,5	3,1	14,4	22,0	59529	59528	59530	59531	59532	59533	59534	59535	59536	59539	59538	59537	59540	59541
Part no. 2,5	3,6	24,0	33,0	59543	59542	59544	59545	59546	59547	59548	59549	59550	59553	59552	59551	59554	59555
Part no. 4	4,3	38,4	53,0	59557	59556	59558	59559	59560	59561	59562	59563	59564	59567	59566	59565	59568	59569
Part no. 6	5,0	57,6	78,0	59571	59570	59572	59573	59574	59575	59576	59577	59578	59581	59580	59579	59582	59583
Part no. 10	6,4	96,0	136,0	59585	59584	59586	59587	59588	59589	59590	59591	59592	59595	59594	59593	59596	59597
Part no. 16	7,5	154,0	203,0	59599	59598	59600	59601	59602	59603	59604	59605	59606	59609	59608	59607	59610	59611
Part no. 25	9,6	240,0	300,0	59613	59612	59614	59615	59616	59617	59618	59619	59620	59623	59622	59621	59624	59625
Part no. 35	10,8	336,0	405,0	59627	59626	59628	59629	59630	59631	59632	59633	59634	59637	59636	59635	59638	59639
Part no. 50	12,6	480,0	580,0	59641	59640	59642	59643	59644	59645	59646	59647	59648	59651	59650	59649	59652	59653

Dimensions and specifications may be changed without prior notice. (RN06)