


# Data Sheet

## BNC socket

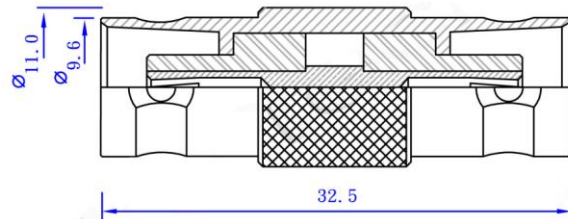

Impedance	50 Ω
Frequency Range	0 to 4 GHz
Voltage Rating	500 volts peak
Dielectric Withstanding Voltage	1500 volts rms
VSWR	M39012 straight connectors: 1.3 max. 0-4GHz M39012 right angle: 1.3 max. 0-4GHz
Other (MIL-C-39012 Cable Connectors)	Contact resistance: center contact 1.5 milliohm outer contact 0.2 milliohm Insertion loss: 0.2db max at 3.0GHz Insulation resistance: 5000 mΩ(min)

**NOTE: FINISH (PLATING THICKNESS IN MICRO-INCHES)**

1. BRASS PER JIS-C3604
2. TEFLON MIL-P-19468
3. NICKEL PL 70 μ" THICK PLATING
4. GOLD PL 1~3μ" OVER NICKEL PL 70 μ" THICK PLATING

3	Insulator	Teflon	White
2	Contact	Brass	Gold
1	Body	Brass	Nickel
No	Description	Material	Finish